## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or to	rade mark: ORION
-----------------------	------------------

Supplier's address: Qualitätssicherung, Oberlaaerstraße 284, 1230 Wien, AT

Model identifier: LED 36a 36W SMD(342pcs) 8mm Band 3000K

Τv	pe	of	light	soui	ce:
. ,	P-	•			···

trol gear, light-

control

ing

Lighting technology used:		LED	Non-directional or directional:	NDLS
Light source cap	o-type	LED module		
(or other electric interface)				
Mains or non-m	nains:	NMLS	Connected light source (CLS):	No
Colour-tuneable	e light source:	No	Envelope:	-
High luminance	light source:	No		
Anti-glare shield	d:	No	Dimmable:	Yes
		Product para	meters	
Parameter		Value	Parameter	Value
		General product	parameters:	
0,	nption in on- 00 h), rounded st integer	36	Energy efficiency class	F
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		4 100 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P <sub>on</sub> ), expressed in W		36,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80
Outer dimen-	Height	2 850	Spectral power dis-	See image
sions without	Width	8	tribution in the	in last page
separate con-	Depth	1	range 250 nm to 800	

nm, at full-load


parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,433			
		nates (x and y)	0,405			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	7	Survival factor	1,00			
the lumen maintenance factor	0,96					

(a)'-': not applicable; (b)'-': not applicable;




Reference No.: WTX21F05049705N001 Page 20 of 24

## Test Data Sheet 7: Luminous intensity distribution diagram

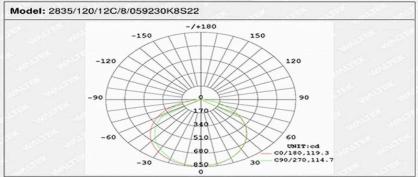

## Test Data Sheet 8: Spectral distribution

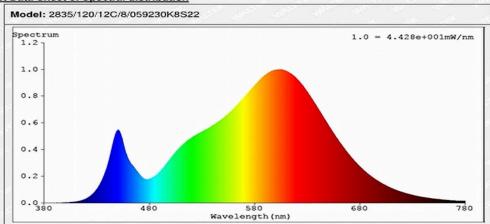

Waltek Testing Group (Foshan) Co., Ltd. http://www.waltek.com.cn